

Practitioner's Docket No. KCC-14,867

Assistant Commissioner for Patents  
Washington, D.C. 20231

ATTENTION: Licensing and Review

PETITION FOR LICENSE FOR FOREIGN FILING  
(U.S. PATENT APPLICATION BEING FILED CONCURRENTLY)  
(37 CFR 5.14)

Please note that this petition requests:

- ☒ expedited handling.  
☒ telephone report.

NOTE: See M.P.E.P. § 140, 6th ed., rev. 3.

1. Petition

Petition is hereby made, in duplicate, for a license under 37 CFR 5.12(b), for the foreign filing of the subject matter for which a corresponding U.S. application is being filed concurrently herewith. A copy of this application is attached hereto to assist in the handling of this petition.

It is requested that the duplicate copy of the petition be returned with the license or other action on the petition.

**CERTIFICATION UNDER 37 C.F.R. 1.10\***  
(Express Mail label number is **mandatory**.)  
(Express Mail certification is optional.)

I hereby certify that this petition and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date \_\_\_\_\_ in a envelope as "Express Mail Post Office to Addressee" Mailing Label Number \_\_\_\_\_ addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

\_\_\_\_\_  
(type or print name of person mailing paper)

\_\_\_\_\_  
Signature of person mailing paper

**WARNING:** Certificate of mailing (first class) or facsimile transmission procedures of 37 C.F.R. 1.8 cannot be used to obtain a date of mailing or transmission for this correspondence.

**\*WARNING:** Each paper or fee filed by "Express Mail" **must** have the number of the "Express Mail" mailing label placed thereon prior to mailing. 37 C.F.R. 1.10(b).

"Since the filing of correspondence under § 1.10 without the Express Mail mailing label thereon is an oversight that can be avoided by the exercise of reasonable care, requests for waiver of this requirement will **not** be granted on petition." Notice of Oct. 24, 1996, 60 Fed. Reg. 56,439, at 56,442.

(Petition for License for Foreign Filing (U.S. Patent Application Being Filed Concurrently) [22-1]—page 1 of 4)



The PTO did not receive the following listed item(s) Sorry we did not receive any check. only a copy of the check.

**2. Identification of inventor(s), title of invention and short statement as to the nature of the invention**

*NOTE: "If a petition for a license under § 5.12(b) is granted prior to the grant of the § 5.12(a) filing receipt license, the former would merge into the latter and would be considered a § 5.12(a) license for the purpose of § 5.15." Notice of February 24, 1984, 1042 O.G. 3-10.*

*NOTE: If no corresponding national or international application has been filed in the United States, the petition for license under § 5.12(b) must also be accompanied by a legible copy of the material upon which a license is desired. This copy will be retained as a measure of the license granted. 37 C.F.R. § 5.13.*

**Inventor(s) name(s): Edward Jason WHITE, Kurtis Lee BROWN, John Herbert CONRAD, Robert James GERNDT, and Jose Enrique MALDONADO**

**Title of invention: MATERIALS HAVING Z-DIRECTION FIBERS AND FOLDS AND METHOD FOR PRODUCING SAME**

*NOTE: Each paper or fee referred to as enclosed herein has the number of the "Express Mail" label placed thereon prior to mailing. 37 CFR 1.16(b).*

*NOTE: An express mail certificate under 37 CFR 1.10 is shown on the presumption that this petition will be mailed simultaneously with the new application.*

It is believed that this invention is clearly of no interest from a security standpoint, as it relates to: variants of known methods for producing nonwoven materials for known commercial products.

(set forth short statement of invention)

**3. Expedited handling** (37 CFR 1.17(h))

*(check and complete the following, if expedited handling is desired)*

- ☒ Expedited handling of this petition for license is requested. The fee therefor is to be paid as follows:
- ☐ Charge Account No. \_\_\_\_\_ \$130.00. A duplicate of this petition is attached.
- ☒ Enclosed is a check in the sum of \$130.00.

**4. Telephone notification of issuance of license**

*(check, if applicable)*

- ☒ Please notify petitioner of the issuance of the license, by telephone, at the number shown below.

Reg. No.: 32,799

Tel. No.: ( 847 ) 490 1400

Customer No.:



SIGNATURE OF PRACTITIONER (PETITIONER)

Roland W. Norris

*(type or print name of practitioner)*

Pauley Petersen Kinne & Fejer  
2800 W. Higgins Road, Suite 365

P.O. Address

Hoffman Estates, Illinois 60195

**PATENT**  
**Docket No. : KCC-14,867**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**  
**APPLICATION FOR UNITED STATES LETTERS PATENT**

**INVENTORS:**

Edward Jason WHITE  
Kurtis Lee BROWN  
John Herbert CONRAD  
Robert James GERNDT  
Jose Enrique MALDONADO

**TITLE:**

**MATERIALS HAVING Z-DIRECTION  
FIBERS AND FOLDS AND METHOD  
FOR PRODUCING SAME**

**ATTORNEYS:**

Roland W. Norris, Esq.  
Pauley Petersen Kinne & Fejer  
2800 West Higgins Road  
Suite 365  
Hoffman Estates, Illinois 60195  
(847) 490-1400

# **MATERIALS HAVING Z-DIRECTION FIBERS AND FOLDS AND METHOD FOR PRODUCING SAME**

## **BACKGROUND OF THE INVENTION**

### **Field of the invention**

This invention relates to a method for producing materials, including films and nonwovens, having z-direction folds or ridges on at least one surface of the material. This invention further relates to a lofty, nonwoven material produced from continuous fibers in which the lofty character of the nonwoven material is the result of the fibers comprising the web having a z-direction orientation, whereby a plurality of ridges or folds are formed on at least one surface of the nonwoven web. These materials are particularly suitable for use in a broad range of applications including fluid management (surge), air and liquid filtration, acoustic and thermal insulation, packing material, absorbents, and cleaning materials. More particularly, these materials are suitable for use as surge, spacer layers, filtration materials and absorbent layers in personal care absorbent products including disposable diapers, incontinence garments, and feminine care products such as sanitary pads and napkins, and in face masks, surgical gowns, sterile wraps and surgical drapes.

### **DISCUSSION OF THE RELATED ART**

Absorbent personal care articles such as sanitary pads and napkins, disposable diapers, incontinent-care pads and the like are widely used, and much effort has been made to improve their effectiveness and functionality. These articles generally include a liquid absorbent material backed by a liquid-impervious barrier

sheet. To enhance the sense of comfort, the absorbent material has a facing of a material which masks at least the body-facing surface of the product. The purpose of this cover material is to help structurally contain the absorbent material and to protect the wearer from continuous direct contact with moisture from previously wetted absorbent material. The cover material is typically of relatively low basis weight nonwoven fabric. Improved product performance has been obtained in these products through the incorporation of a surge management material disposed between the cover material and the absorbent material. The surge management material is made from a relatively high basis weight, low density, that is, thick, nonwoven web material.

In nonwoven webs, the fibers comprising the web are generally oriented in the x-y plane of the web and the resulting nonwoven web material is relatively thin, that is lacking in loft or significant thickness. Loft or thickness in a nonwoven web suitable for use in personal care absorbent articles promotes comfort (softness) to the user, surge management and fluid distribution to adjacent layers.

In order to impart loft or thickness to a nonwoven web, it is generally desirable that at least a portion of the fibers comprising the web be oriented in the z-direction. Conventionally, such lofty nonwoven webs are produced using staple fibers. See, for example, U.S. Patent 4,837,067 which teaches a nonwoven thermal insulating batt comprising structural staple fibers and bonding staple fibers which are entangled and substantially parallel to the faces of the batt at the face portions and substantially perpendicular to the faces of the batt, and U.S. Patent 4,590,114 which teaches a batt including a major percent of thermo-mechanical wood pulp fibers

stabilized by the inclusion of a minor percent of thermoplastic fibers including staple length thermoplastic fibers. Alternatively, conventional high loft forming processes rely on pre-forming processes such as fiber crimp formed on a flat wire or drum, and post-forming processes such as creping or pleating of the formed web.

## **SUMMARY OF THE INVENTION**

In contradistinction to the known art, the present invention does not first form a web of material and pleat it. Rather, fibers are looped on themselves without being first being formed into a material web. These fiber level loops, running from a first major surface of the web to a second major surface, are aggregated in the cross machine direction to form ridged structures herein sometimes called “waves” or “folds” to distinguish them from “pleats” which refer to structures in preformed web or mesh material that has been folded on itself. A “wavelength” may generally be considered the transit of a loop between its successive trough points on one major surface of the web.

Accordingly, it is one object of this invention to provide a lofty nonwoven web material comprising substantially continuous fibers as opposed to staple fibers traditionally used in the manufacture of such nonwoven materials.

It is yet another object of this invention to provide a method for producing nonwoven materials having z-direction orientation portions.

These and other objects of this invention are addressed by a method for producing a material having z-direction folds comprising conveying a substantially unformed and flat base material of substantially continuous fibers, and added



materials if desired, on a first moving surface into a nip formed by the first moving surface and a second moving surface, the second moving surface traveling at a slower speed than the first moving surface, resulting in formation of a plurality of z-direction folds on at least one surface of the material. The method of this invention conveys a material by means of a moving surface into a confined space (the nip) and removes it from the confined space by means of a second moving surface, whereby the rate of removal of the material from the confined space is slower than the rate of material input to the confined surface, resulting in formation of a nonwoven material having z-direction components. The z-direction components produce ridges or ripples on both the major, or x-y surfaces of the material. According to this method the extent of the ridges, and thus the character of the resulting material formed, may be easily affected by a number of operating parameters including, but not limited to, the type of material being processed, geometry of the confined space, the means for transferring the material in the confined space from the first moving surface to the second moving surface, presence or lack of a binding agent such as an adhesive, and the relative speeds of the first and second moving surfaces.

Typically, the size of the confined space (nip) and the relative speeds of the moving surfaces are related with respect to the formation of a web having a desired density of folds. For example, for very low differential speeds between the two moving surfaces, the size of the nip will be very small. As the differential speeds increase, the size of the nip will also increase.

According to certain embodiments herein, a material of this invention, as produced with the method of this invention, comprises a nonwoven web with a plurality of substantially continuous fibers having a z-direction orientation and forming a plurality of ridges on the major surfaces of the nonwoven web.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

These and other objects and features of this invention will be better understood from the following detailed description taken in conjunction with the drawings wherein:

Fig. 1 is a schematic diagram of the method of this invention for producing materials having z-direction components;

Fig. 2 is a diagram of a side view of a nonwoven web having z-direction components in the form of ridges or ripples formed in accordance with the method of this invention;

Figs. 3A and 3B are diagrammatic representations of a conventional nonwoven web and a high loft nonwoven web in accordance with this invention, respectively;

Figs. 4-9 are photographs in side view of nonwoven materials produced in accordance with the method of this invention showing various loop structures.

## **DESCRIPTION OF PREFERRED EMBODIMENTS**

As used herein, the term “nonwoven web” or “nonwoven material” means a web having a structure of individual fibers, filaments or threads which are interlaid, but not in a regular or identifiable manner such as those in a knitted fabric

or films that have been fibrillated. Nonwoven webs or materials have been formed from many processes such as, for example, meltblowing processes, spunbonding processes, and bonded carded web processes. The basis weight of nonwoven webs or materials is usually expressed in ounces of material per square yard (osy) or grams per square meter (gsm), and the fiber diameters usable are usually expressed in microns. (Note that to convert from osy to gsm, multiply osy by 33.91.)

As used herein, the term “z-direction” refers to fibers disposed outside of the plane of orientation of a web. Fig. 3A is a diagram showing a nonwoven web without z-direction fibers. That is, all of the fibers are generally oriented in the direction indicated by arrow 27. By comparison, Fig. 3B is a diagram showing a nonwoven web having z-direction fibers in accordance with this invention. That is, in addition to fibers oriented in the direction of arrow 28, fibers are also oriented in the direction of arrows 29 and 30. The term “as formed z-direction fibers” as used herein refers to fibers that become oriented in the z-direction during forming of the nonwoven web as distinguished from fibers having a z-direction component resulting from post-forming processing of the nonwoven web, such as in the case of mechanically crimped or creped nonwoven webs.

As used herein, the term “spunbond fibers” refers to small diameter fibers which are formed by extruding molten thermoplastic material as filaments from a plurality of fine, usually circular capillaries of a spinneret as taught, for example, by U.S. Patent 4,340,563 to Appel et al. and U.S. Patent 3,802,817 to Matsuki et al.

As used herein, the term “meltblown fibers” refers to fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity gas streams (for example, airstreams) which attenuate the filaments of molten thermoplastic material to reduce their diameter, which may be to microfiber diameter. Such a process is disclosed, for example, by U.S. Patent 3,849,241 to Butin.

As used herein, the term “microfibers” refers to small diameter fibers having an average diameter not greater than about 75 microns, for example, having an average diameter of from about 0.5 microns to about 50 microns, or more particularly, having an average diameter of from about 2 microns to about 40 microns.

As used herein, the term “polymer” generally includes, but is not limited to, homopolymers, copolymers, such as, for example, block, graft, random and alternating copolymers, terpolymers, etc., and blends and modifications thereof. Furthermore, unless otherwise specifically limited, the term “polymer” also includes all possible geometric configurations of the material. These configurations include, but are not limited to, isotactic, syndiotactic, atactic and random symmetries.

As used herein, the term “personal care absorbent article” means disposable diapers, training pants, absorbent underpants, adult incontinence products, feminine hygiene products and the like.

As used herein, the term “homofilament” refers to a fiber formed from only one polymer. This is not meant to exclude fibers formed from one polymer to

which small amounts of additives have been added for coloration, anti-static properties, lubrication, hydrophilicity, etc.

As used herein, the term "bicomponent fibers" refers to fibers which have been formed from at least two polymers extruded from separate extruders but spun together to form one fiber. Bicomponent fibers are also sometimes referred to as conjugate fibers or multicomponent fibers. Bicomponent fibers are taught by U.S. Patent 5,382,400 to Pike et al.

As used herein, the term "biconstituent fibers" refers to fibers which have been formed from at least two polymers extruded from the same extruder as a blend. The term "blend" is defined below. Biconstituent fibers are sometimes also referred to as multiconstituent fibers. Fibers of this general type are discussed in, for example, U.S. Patent 5,108,827 to Gessner. As used herein, the term "blend" means a mixture of two or more polymers.

As used herein, the term "substantially continuous fibers" refers to fibers, including without limitation, spunbond and meltblown fibers, which are not cut from their original length prior to being formed into a nonwoven web or fabric. Substantially continuous fibers may have average lengths ranging from greater than about 15 centimeters to more than one meter, and up to the length of the web or fabric being formed. The definition of "substantially continuous fibers" includes fibers which are not cut prior to being formed into a nonwoven web or fabric, but which are later cut when the nonwoven web or fabric is cut, and fibers which are substantially linear or crimped.

The term "staple fibers" means fibers which are natural or cut from a manufactured filament prior to forming into a web, and which have an average length ranging from about 0.1-15 centimeters, more commonly about 0.2-7 centimeters.

As used herein, the term "through-air bonding" or "TAB" means the process of bonding a nonwoven, for example, a bicomponent fiber web in which which is sufficiently hot to melt one of the polymers of which the fibers of the web are made is forced through the web.

As used herein, the term "coform" means a process in which at least one meltblown diehead is arranged near a chute through which other materials are added to the base material or the web while it is forming. Such other materials may be pulp, superabsorbent particles, cellulose or staple fibers, for example. Coform processes are shown in commonly assigned U.S. Patent 4,818,464 to Lau.

Fig. 1 is a schematic diagram showing the method of this invention for producing materials including, but not limited to, films, nonwoven materials and woven materials having z-direction components in the form of ridges or peaks on at least one face. The ridges or peaks formed in accordance with the method of this invention may be regularly spaced or irregular in spacing and shape.

As shown in Fig. 1, a base material 21 of lightly, or nonfunctionally, bonded fibers is transported or conveyed on a first moving surface 11 into the confined space defined by nip 13 formed by first moving surface 11 and second moving surface 12. "Nonfunctionally bonded" is a bonding sufficient only to hold the fibers in place for processing according to the method herein but so light as to not

hold the fibers together were there to be manipulated manually. Such bonding may be incidental or eliminated altogether if desirable. A coform unit 44 for adding additional materials to the y base material is attached near the outlet of the fiber distribution unit 16. First moving surface 11 is moving in the direction of arrow 18 at a given speed. Base material 21 is held down on first moving surface 11 by a hold down vacuum 14. In nip 13, base material is transferred to second moving surface 12 moving in the direction indicated by arrow 19 via positive air pressure from a blow up box 15a underneath first moving surface 11 and a transfer vacuum 20 beneath the second moving surface. The transfer of the material in nip 13 from first moving surface 11 to second moving surface 12 is accomplished by the application of a transfer vacuum beneath second moving surface 12 generated by high vacuum slot 15b and a transfer vacuum represented by reference numeral 20. It will be appreciated that the present invention may work without a true nip, that is, the first and second surfaces may be serially offset to such a degree that there is no true overlap in their opposite facing surfaces. Second moving surface is moving at a speed slower than the speed of first moving surface 11. First and second moving surfaces are normally foraminous or perforate, wire mesh belts, known in the art as "wires". In accordance with one preferred embodiment of this invention, the speed of first moving surface 11 is in the range of about 1.25 to about 7 times faster than the speed of second moving surface 12.

The confining nature of nip 13 is such that, as the base material 21 of fibers enters nip 13 and is taken away at a slower speed by second moving surface 12,

base material 21 accumulates in nip 13 causing the fibers to bunch up and translate into a z-direction displacement until the volume of nip 13 is filled. More specifically, base material 21 moving in the direction indicated by arrow 18 encounters a slowdown in nip 13 as a result of which the base material 21 moves in the z-direction until it hits the surface of second moving surface 12 and is removed thereby. As a result, the material exiting from nip 13 comprises at least one surface, and normally both surfaces, having ridges or peaks as indicated by reference numeral 22.

Although suitable for producing ridged films and pleated wovens, the method of this invention is particularly suitable for producing preponderantly open, or low density, nonwoven webs of continuous fibers having z-direction components. Specifically, the material produced in accordance with a preferred embodiment of this invention is a nonwoven web comprising a plurality of substantially continuous fibers having a z-direction orientation and forming the ridges or peaks 22.

The substantially continuous fibers are preferably selected from the group consisting of homofilament fibers, bicomponent fibers, biconstituent fibers and combinations thereof. The substantially continuous fibers are preferably formed with polymers selected from the group consisting of polyolefins, polyamides, polyesters, polycarbonates, polystyrenes, thermoplastic elastomers, fluoropolymers, vinyl polymers, and blends and copolymers thereof.

Suitable polyolefins include, but are not limited to, polyethylene, polypropylene, polybutylene, and the like; suitable polyamides include, but are not limited to, nylon 6, nylon 6/6, nylon 10, nylon 12 and the like; and suitable polyesters



include, but are not limited to, polyethylene terephthalate, polybutylene terephthalate and the like. Particularly suitable polymers for use in the present invention are polyolefins including polyethylene, for example, linear low density polyethylene, low density polyethylene, medium density polyethylene, high density polyethylene and blends thereof; polypropylene; polybutylene and copolymers as well as blends thereof. Additionally, the suitable fiber forming polymers may have thermoplastic elastomers blended therein. In addition, staple fibers may be employed in the nonwoven web as a binder.

In order to provide stability to the product material, the nonwoven web is bonded, either by application of an adhesive from adhesive system 25 or by thermal bonding such as by through-air bonding, a calender, or the like, or by means of a hot air knife (HAK) 24. A hot air knife is used to bond the individual polymer fibers together at various locations so that the web has increased strength and structural integrity for subsequent treatments such as passage through a through-air bonding (TAB) unit. A conventional hot air knife includes a mandrel with a slot that blows a jet of hot air onto the nonwoven web surface. Such hot air knives are taught, for example, by U.S. Patent 5,707,468 to Arnold et al.

As shown in Fig. 1, a base material 21 of substantially continuous fibers is fed onto first moving surface 11 from a Fiber Distribution Unit 16 as at reference numeral 16. However, it will be apparent to those skilled in the art that certain base material 21 fibers may be formed directly on first moving surface 11 or unwound from rewound spools or the like.

Base materials suitable for use in the material and method of this invention are preferably selected from the group consisting of spunbond, meltblown, spunbond-meltblown-spunbond laminates, coform, spunbond-film-spunbond laminates, bicomponent spunbond, bicomponent meltblown, biconstituent spunbond, biconstituent meltblown, pulp, superabsorbent, and combinations thereof.

The characteristics of the material produced in accordance with the method of this invention may be varied by varying such method elements as nip geometry, including the vertical distance between first moving surface 11 and second moving surface 12 as well as the extent of overlap between first moving surface 11 and second moving surface 12, vacuum strength and location, bonding mechanism, and speeds of the material entering and leaving nip 13. The type of fiber will of course have an affect on the morphology of the web made. In addition, although the present invention generally produces a self-supporting lofty web, the end product may include a support structure or a second material 23, as shown being introduced into nip 13 from the unwind designated by reference numeral 17.

Fig. 2 is a diagram showing a side view of a z-direction component nonwoven web 40 produced in accordance with the method of this invention comprising ridges 41 formed by substantially continuous fibers.

Fig. 4 is a photograph of a side view of a nonwoven web produced in accordance with the method of this invention for a 2.5 osy basis weight in which the sheath/core bicomponent straight individual fibers are readily visible showing regularly and elliptically shaped looped fibers at both major surfaces of the web. The

web is substantially open and forms a plurality of channels running in the cross machine direction between loops. The loops are oriented off the true z-axis and are unidirectional, i.e. all leaning one way. A nonwoven web according to the present invention has a basis weight preferably in the range of about 0.25 osy to about 50 osy.

5                    Fig. 5 is a photograph of a side view of a nonwoven web produced in accordance with the method of this invention, but at a higher speed differential than Fig. 4, for a 3.0 osy basis weight and in which the substantially continuous individual fibers are readily visible showing slightly more random but still basically elliptically shaped looped fibers at both major surfaces of the web. The web is substantially  
10                    open, i.e. the fibers are not tightly packed and the web exhibits a preponderance of air spaces rather than fiber at its surfaces, and the web forms a plurality of channels running in the cross machine direction between loops. In terms of gross morphology the material of Fig. 5 will have smoother surfaces and less evident ridges than that of Fig. 4.

15                    Fig. 6 is a photograph of a side view of a nonwoven web produced in accordance with the method of this invention, but with crimped rather than straight fibers, for a 3.2 osy basis weight and in which the substantially continuous individual fibers are readily visible showing even more random, but still basically elliptically shaped looped fibers at both major surfaces of the web. The web is substantially open  
20                    but does not show distinct channels running in the cross machine direction between loops. In terms of gross morphology the material of Fig. 6 will have broader and less regular ridges, i.e. "regular" referring to the periodicity of pleats in the machine

direction and the frequency with which the pleats extend from edge to edge in the cross direction than that of Fig. 5.

Fig. 7 is a photograph of a side view of a nonwoven web produced in accordance with the method of this invention, but at a still higher speed differential, for a 4.0 osy basis weight and in which the looped fibers are highly compressed. The tightly elliptical looped fibers do not show channels between the waves. The web is becoming more closed than open in nature. In terms of gross morphology the material of Fig. 7 will have still smoother surfaces and less evident ridges than those of the previous figures.

Fig. 8 is a photograph of a side view of a nonwoven web produced in accordance with the method of this invention, but at a low 0.5 osy basis weight and in which the substantially continuous individual fibers are readily visible showing quite random waving to the point of losing the basically elliptically shaped and regular periodicity waving on the surface of the web. The loops may be considered multi-directional, i.e. leaning at random away from the orthogonal z-axis. The web is very open. In terms of gross morphology the material of Fig. 8 will have smooth surfaces, less evident ridges and many thin spots.

Fig. 9 is a photograph of a side view of a nonwoven web produced in accordance with the method of this invention, but with side by side bicomponent crimped fibers at a low 0.8 osy basis weight again showing quite random waving. As would be expected, the web shows a lack of regular periodicity waving on the surface.

The web is very open. In terms of gross morphology the material of Fig. 9 will have smooth surfaces, almost nonevident ridges and many thin spots.

In accordance with one preferred embodiment of this invention, the substantially continuous fibers are bicomponent fibers. Particularly suitable polymers for forming the structural component of suitable bicomponent fibers include polypropylene and copolymers of polypropylene and ethylene, and particularly suitable polymers for the adhesive component of the bicomponent fibers includes polyethylene, more particularly linear low density polyethylene, and high density polyethylene. In addition, the adhesive component may contain additives for enhancing the crimpability and/or lowering the bonding temperature of the fibers, and enhancing the abrasion resistance, strength and softness of the resulting webs.

The nonwoven web of the material of this invention has a basis weight in the range of about 0.25 osy to about 50 osy. To enhance the absorption characteristics of the nonwoven material, in accordance with one embodiment of this invention, the nonwoven web comprises an absorbent, for example, superabsorbent particles. In accordance with one embodiment of this invention, a support structure is attached to at least one face of the nonwoven web so as to provide strength thereto. The resulting laminate structure provides support for the high loft structure, strength for winding, converting, etc., and a boundary layer to either enhance or retard fluid flow into the lofty absorbent structure. The support structure may include spunbond webs of various types including liners, perforated, micro-fiber, creped, etc., spunbond-meltblown-spunbond (SMS), meltblown, and/or films.

Potential applications for the nonwoven web of this invention include personal care absorbent articles such as diapers, training pants, incontinence garments, feminine care products including sanitary pads and napkins, all surge materials, loop for hook and loop, air filtration, liquid filtration, body scrub pads, oil sorb, industrial and baby wipes, insulation material, packaging material, and translucent or shading material for lamp shades or the like. In the case of filtration materials, the method of this invention greatly increases the surface area available for filtration. In addition, the method of this invention may be suitable for pleating fabrics. And, for rolls of diapers, a composite material could be produced by ridging or ruffling a high loft surge/pulp/superabsorbent material laminate and placing it in between an outer cover and a liner, which would produce a laminate with all of the components of a diaper in a single step, which could be wound up and cut and placed later on converting machines.

While in the foregoing specification this invention has been described in relation to certain preferred embodiments thereof, and many details have been set forth for purpose of illustration, it will be apparent to those skilled in the art that the invention is susceptible to additional embodiments and that certain of the details described herein can be varied considerably without departing from the basic principles of the invention.

WE CLAIM:

1. A material comprising:

a nonwoven web comprising a plurality of substantially continuous fibers having a z-direction orientation and forming a plurality of ridges on both surfaces of the nonwoven web.

2. The lofty material of claim 1 further comprising:

the nonwoven web being a lofted web with x, y and z dimensions, with x being the machine direction, y being the cross machine direction and z being the loft direction;

first and second major surfaces in x-y planes and spaced apart in the z direction;

the continuous fibers being folded to form loops extending in the z direction and the loops combining to form a material with a succession of waves spaced along the machine direction, each wave running in the cross machine direction.

3. The material according to Claim 2 further including each wave having at least one of its leading or trailing edges bonded to an adjacent leading or trailing edge to thereby hold its z-direction shape.

4. The material according to Claim 3 wherein the leading and trailing edges of one wave are bonded together.

5. The material according to Claim 3 wherein the leading and trailing edges of one wave are bonded together and bonded to the trailing and leading edges of the adjacent waves, respectively.

6. The material according to Claim 2 further including each wave being substantially elliptically shaped in cross section between the major surfaces.

7. The material according to Claim 2 further including: the waves are oriented off the orthogonal z- axis and are unidirectional.

8. The material according to Claim 2 further including: the waves are oriented off the orthogonal z- axis and are multi-directional.

9. The material according to Claim 2 further including: the first major surface being preponderantly closed.

10. The material according to Claim 2 further including: the second major surface being preponderantly closed.

11. The material according to Claim 2 further including: the waves being randomly spaced in the machine direction.



12. The material according to Claim 2 further including: the waves being regularly spaced in the machine direction.

13. The material according to Claim 2 further including: the waves being random length in the cross machine direction.

14. The material according to Claim 2 further including: the waves being regular length in the cross machine direction.

15. The material according to Claim 14 wherein: the waves extend from edge to edge in the cross machine direction.

16. A material in accordance with Claim 1, wherein the substantially continuous fibers are selected from the group consisting of spunbond, meltblown and combinations thereof.

17. A material in accordance with Claim 1, wherein the substantially continuous fibers comprise an adhesive.

18. A material in accordance with Claim 1, wherein the substantially continuous fibers are thermally bonded.

19. A material in accordance with Claim 1, wherein the nonwoven web has a basis weight in a range of about 0.25 osy to about 50 osy.

20. A material in accordance with Claim 1, wherein the substantially continuous fibers are polymeric fibers.

21. A material in accordance with Claim 20, wherein the polymeric fibers are thermoplastic fibers.

22. A material in accordance with Claim 1, wherein the substantially continuous fibers are selected from the group consisting of homofilament fibers, bicomponent fibers, biconstituent fibers and combinations thereof.

23. A material in accordance with Claim 1, wherein a support structure is attached to at least one face of the nonwoven web.

24. A material in accordance with Claim 1, wherein the nonwoven web further comprises an absorbent.

25. A method for producing a material having z-direction folds comprising:

conveying continuous fibers on a first moving surface from a first moving surface to a second moving surface, the second moving surface traveling at a slower speed than the first moving surface, resulting in formation of a material having a plurality of z-direction folds on both surfaces of the material.

26. The method for producing a material having z-direction folds according to claim 25 further comprising:

positioning the first moving surface and the second moving surface to form a nip therebetween.

27. A method in accordance with Claim 25 wherein the continuous fibers are selected from the group consisting of spunbond, meltblown, spunbond-meltblown-spunbond laminates, coform, spunbond-film-spunbond laminates, bicomponent spunbond, bicomponent meltblown, biconstituent spunbond, biconstituent meltblown, and combinations thereof.

28. A method in accordance with Claim 25, wherein the first moving surface is traveling in a range of about 1.25 to about 7 times faster than the second moving surface.

29. A method in accordance with Claim 25, wherein the first moving surface is a forming surface on which the fibers are formed.

30. A method in accordance with Claim 25 wherein the fibers are lightly bonded.

31. A method in accordance with Claim 25, wherein the nonwoven material is bonded by at least one of an adhesive bonding process and a thermal bonding process.

32. A method in accordance with Claim 25, wherein the first moving surface and the second moving surface are perforate.

33. A method in accordance with Claim 32, wherein the material is transferred from the first moving surface to the second moving surface using a controlled vacuum whereby the material is pulled in a direction of the second moving surface.

34. A method in accordance with Claim 33, wherein the material is transferred from the first moving surface to the second moving surface using a positive air pressure whereby the material is pushed in a direction of the second moving surface.

35. A method in accordance with Claim 25, wherein at least one additional material is applied to a face of the base material, forming a composite or laminate.

36. A method in accordance with Claim 25 wherein the first moving surface and second moving surface face opposing directions.

37. A method in accordance with Claim 36 wherein the first moving surface and second moving surface have no directly opposing faces to form a channel.

38. A method in accordance with Claim 25, wherein the continuous fibers comprise a plurality of thermoplastic fibers

39. A personal care absorbent article comprising:  
a nonwoven web comprising a plurality of substantially continuous fibers having a z-direction orientation and forming a plurality of ridges on both surfaces of the nonwoven web.


40. A personal care absorbent article in accordance with Claim 39, wherein the nonwoven web further comprises an absorbent.

41. A filtration material comprising: a nonwoven web comprising a plurality of substantially continuous fibers having a z-direction orientation and forming a plurality of ridges on at least one surface of the nonwoven web.

42. A filtration material in accordance with Claim 41, wherein a support structure is attached to at least one face of the nonwoven web.


## ABSTRACT OF THE DISCLOSURE

A method for producing a material having z-direction waves in which a layer of continuous fibers is conveyed on a first moving surface into a nip formed by the first moving surface and a second moving surface which is traveling at a slower speed than the first moving surface, resulting in formation of a plurality of z-direction loops in the fibers giving loft to the material and a wave pattern producing ridges on both major surfaces of the resultant nonwoven web. The method permits easy real time adjustment of manufacturing parameters to produce a variety of materials. The method further produces lofty nonwovens at a commercially viable rate.



11-10



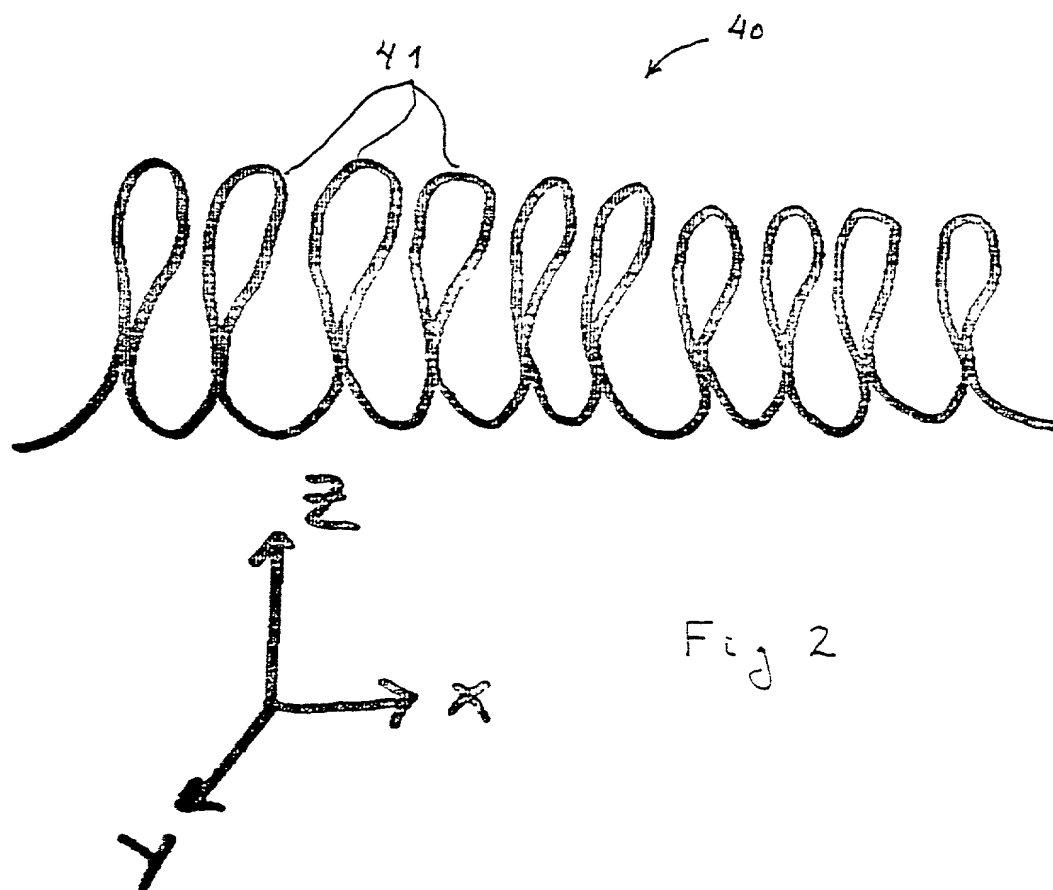

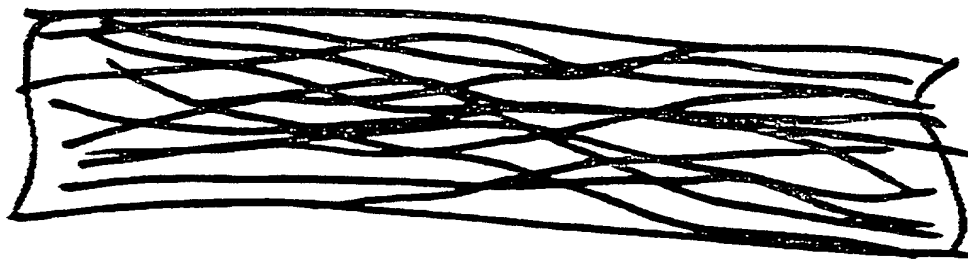


Fig. 3A

Prior Art

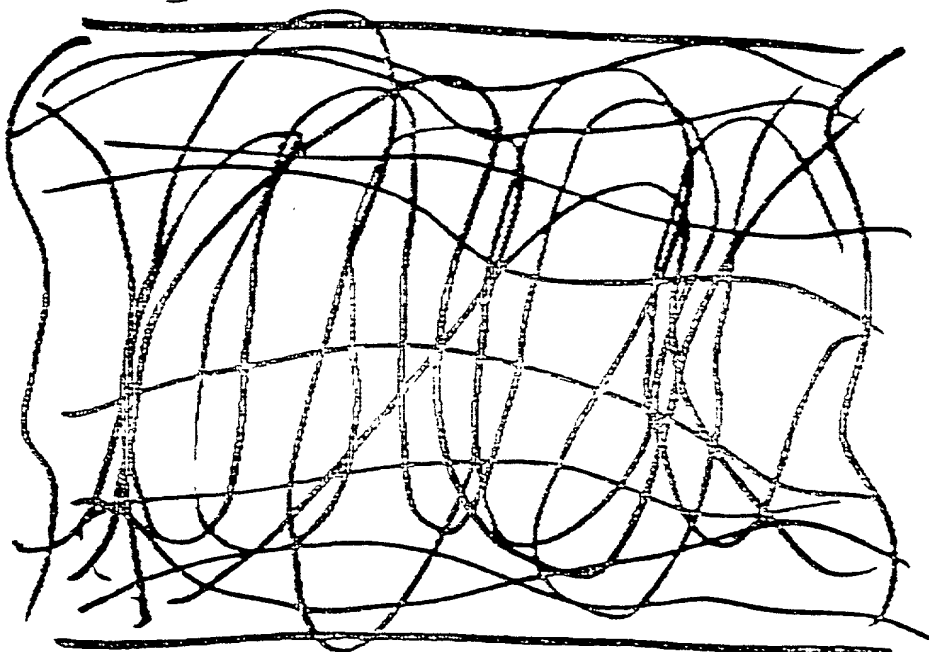
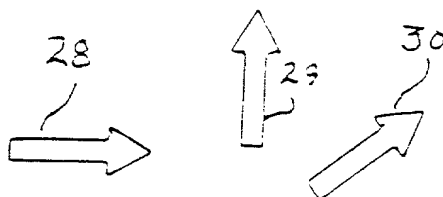


Fig. 3B

# Rush Transfer (on-line)

## 2.5 osy, S/C "straight" Fibers

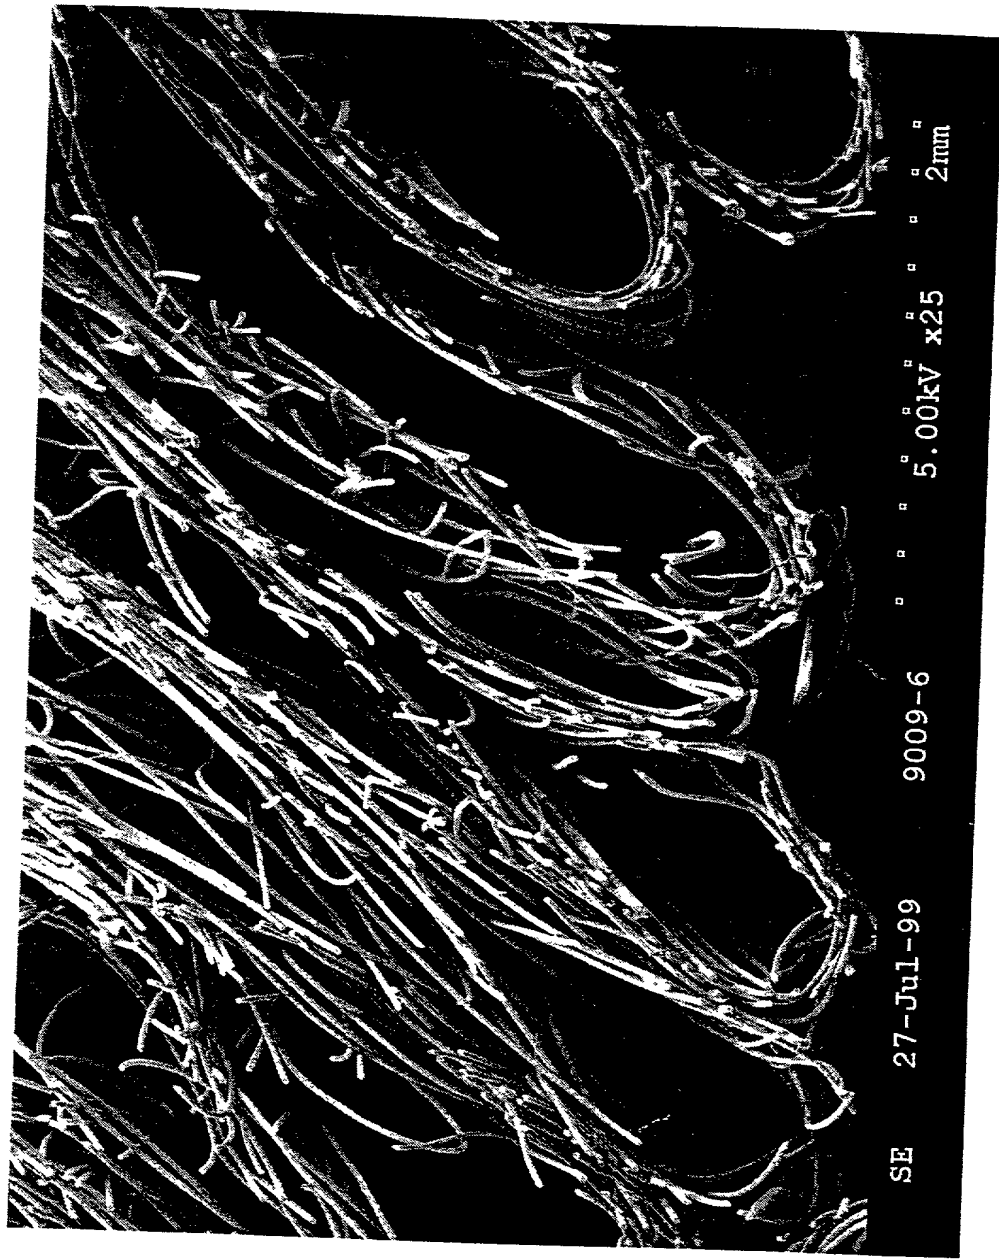


Fig. 4

Rush Transfer

3.0 osy

(on-line)

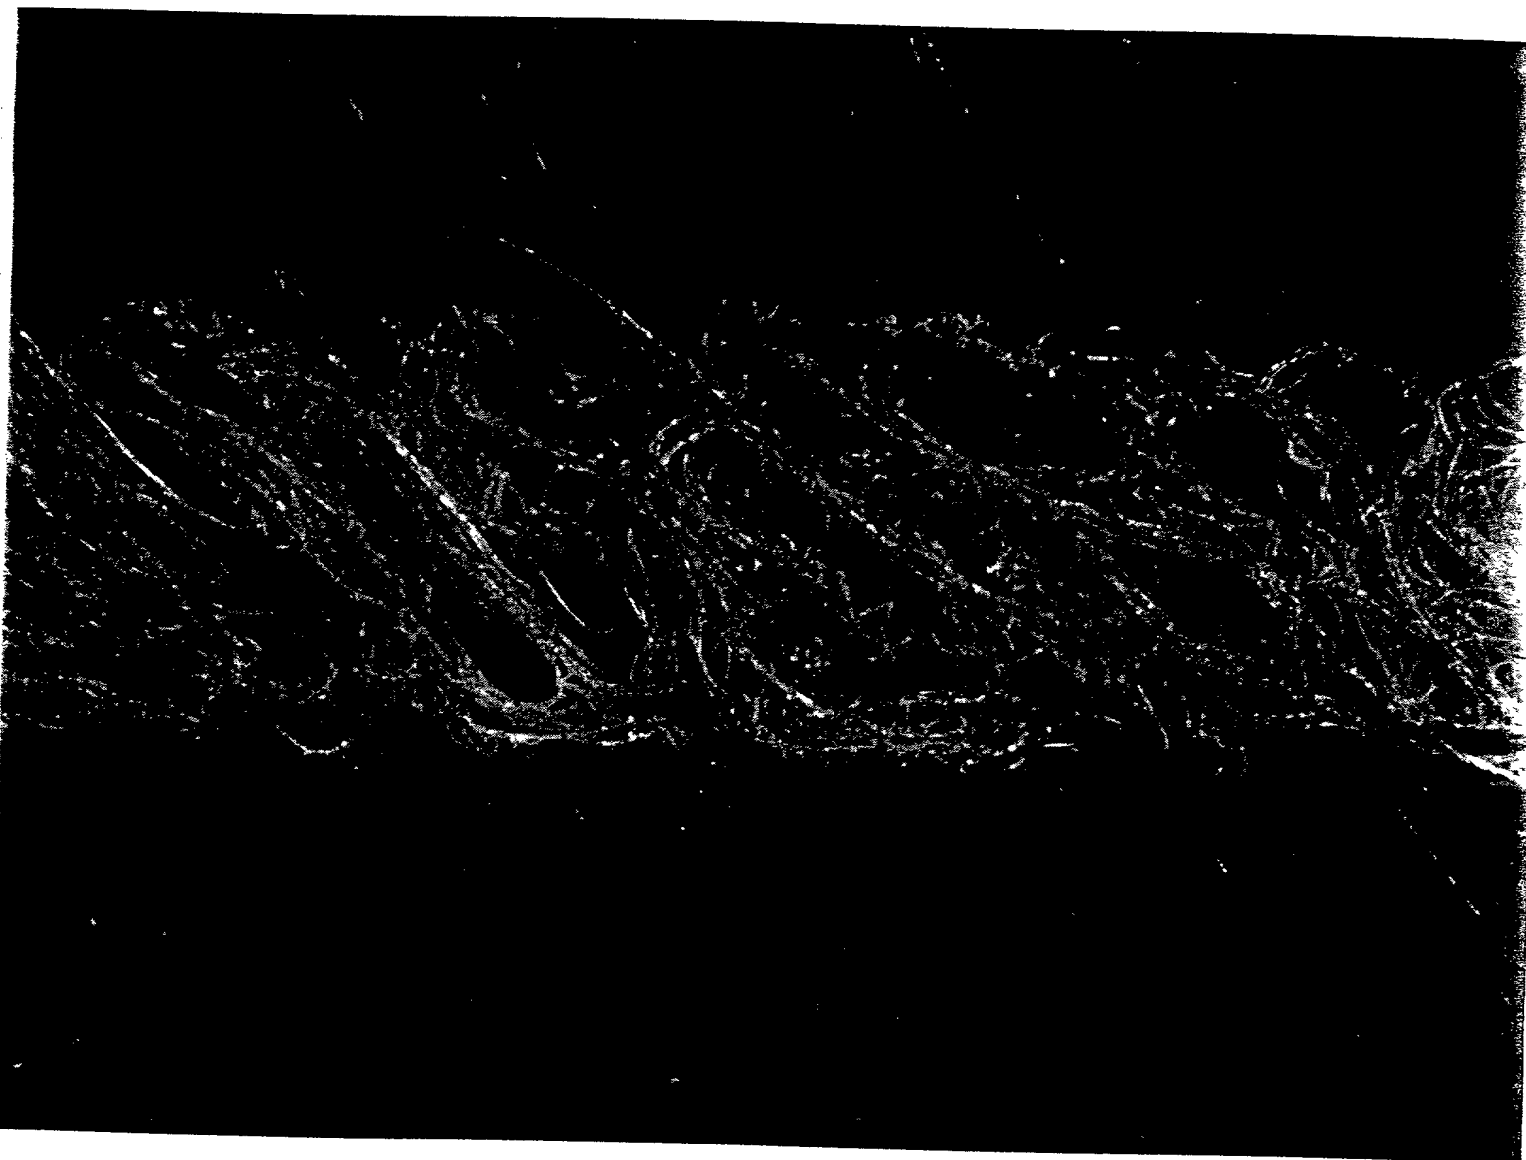


Fig 5

Rush Transfer

(on-line)

3.20sy


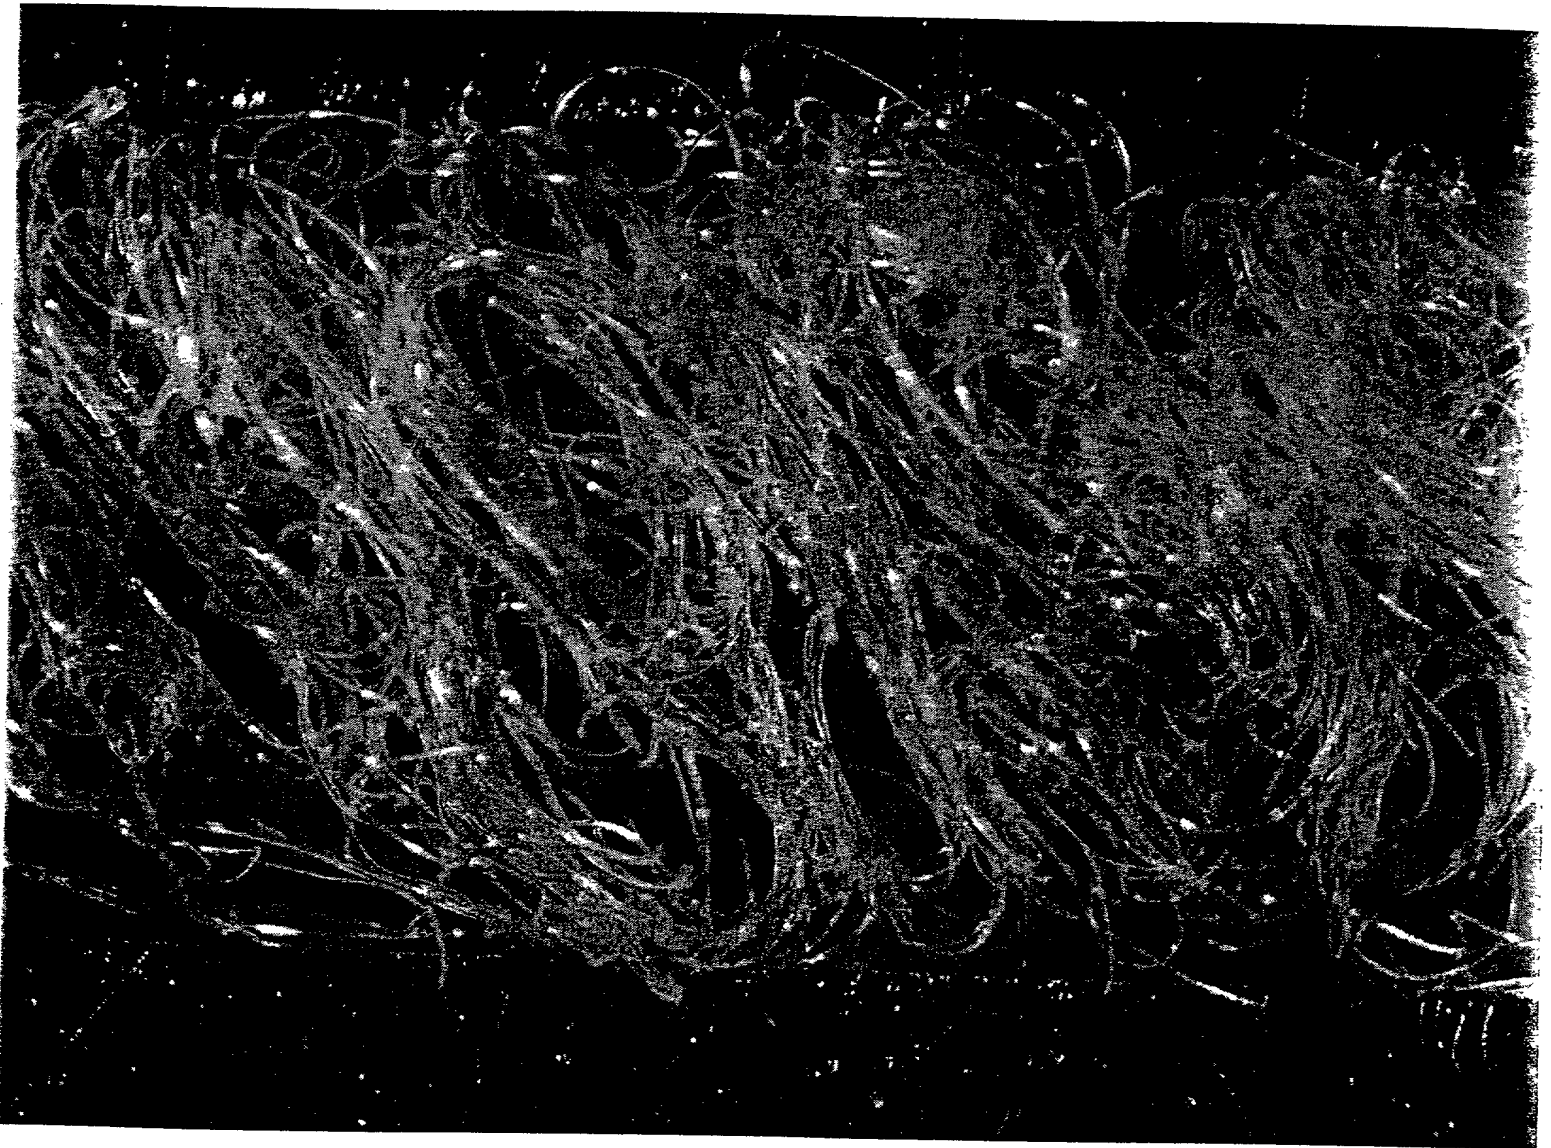


Fig 6

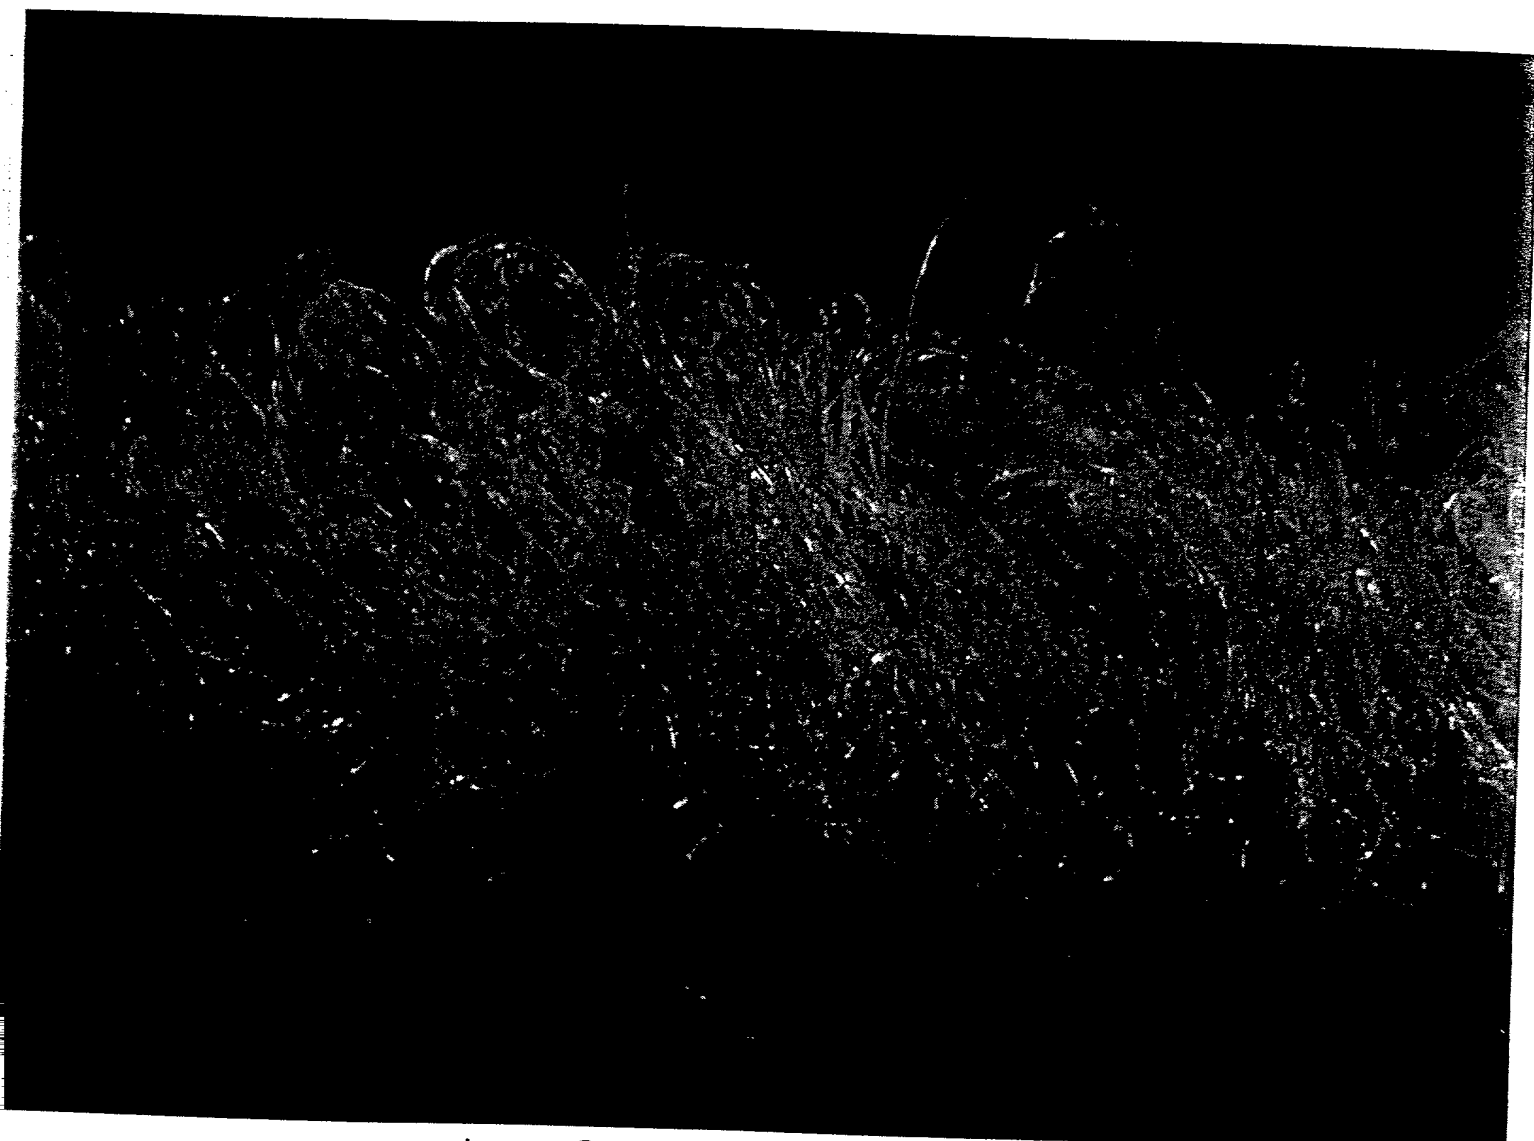


40sy High Rush SB Rush Transfer  
(on-line)

Fig 7

Rush Transfer (on-line)

0.5 osy

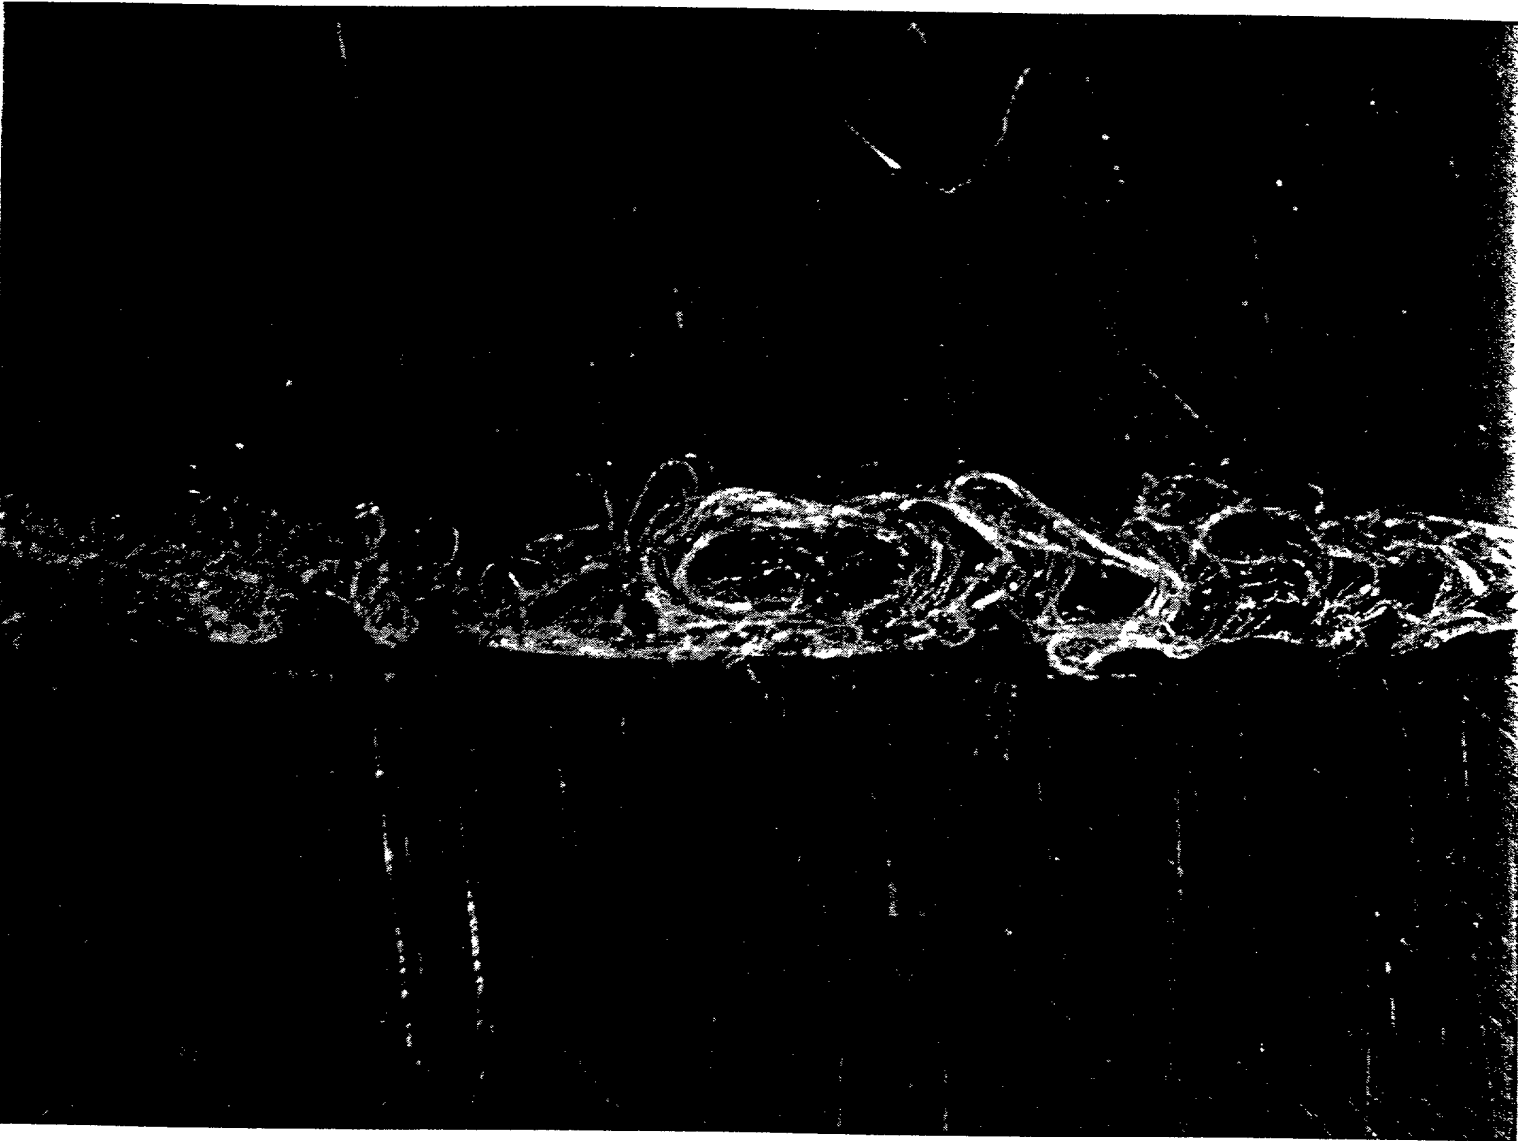

8

# 08 osy, S/S “crimped” Fibers





**COMBINED DECLARATION, POWER OF ATTORNEY AND PETITION**

We, the inventors,

1.    Name:                    Edward Jason WHITE  
      Residence:            Alpharetta, Georgia  
      Post Office Address: 3585 Waters Cove Way  
                                 Alpharetta, Georgia 30202  
      Citizenship:           United States of America
2.    Name:                    Kurtis Lee BROWN  
      Residence:            Alpharetta, Georgia  
      Post Office Address: 700 Rhodes Creek Trail  
                                 Alpharetta, Georgia 30004  
      Citizenship:           United States of America
3.    Name:                    John Herbert CONRAD  
      Residence:            Alpharetta, Georgia  
      Post Office Address: 625 Briars Bend  
                                 Alpharetta, Georgia 30004  
      Citizenship:           United States of America
4.    Name:                    Robert James GERNDT  
      Residence:            Roswell, Georgia  
      Post Office Address: 9158 Branch Valley Way  
                                 Roswell, Georgia 30076  
      Citizenship:           United States of America
5.    Name:                    Jose Enrique MALDONADO  
      Residence:            Alpharetta, Georgia  
      Post Office Address: 11101 Lexington Farm Drive  
                                 Alpharetta, Georgia 30004  
      Citizenship:           United States of America

declare that we have reviewed and understand the contents of the attached specification and claims and we verily believe that we are the original, first and joint inventors or discoverers of the invention or discovery in

**MATERIALS HAVING Z-DIRECTION FIBERS AND FOLDS  
AND METHOD FOR PRODUCING SAME**

described and claimed in the attached specification; that this application discloses and claims subject matter disclosed in our earlier Provisional patent application of which we hereby claim the benefit under 35 U.S.C. § 119(e), Serial No. 60/132,028, filed 30 April 1999; that as to the subject matter of this application which is common to said earlier application; that we do not know and do not believe that this invention was ever known or used in the United States before our invention or discovery thereof; that to the best of our knowledge and belief the invention has not been in public use or on sale in the United States more than one year prior to our application, or patented or made the subject of an inventors' certificate in any foreign country prior to the date of our application on an application filed by ourselves or our legal representatives or assigns more than twelve months prior to our application in this country; that we acknowledge our duty to disclose information of which we are aware which is material to the examination of this application in accordance with 37 C.F.R. 1.56(a); and that no application for patent or inventors' certificate on this invention or discovery has been filed by us or our legal representatives or assigns in any country foreign to the United States, except as follows:

None

#### POWER OF ATTORNEY

We hereby appoint the following attorneys to prosecute this application and transact all business in the United States Patent and Trademark Office connected therewith:

Patricia A. Charlier	Reg. No. 38,840	Brian C. Pauls	Reg. No. 40,122
Thomas J. Connelly	Reg. No. 28,404	Sebastian C. Pugliese III	Reg. No. 42,091
Gregory E. Croft	Reg. No. 27,542	James B. Robinson	Reg. No. 34,912
Jeffrey B. Curtin	Reg. No. 37,601	Karl V. Sidor	Reg. No. 32,597
Jeremiah J. Duggan	Reg. No. 24,470	Douglas H. Tulley	Reg. No. 34,743
Steven D. Flack	Reg. No. 40,608	Patrick C. Wilson	Reg. No. 31,893
Thomas M. Gage	Reg. No. 33,385	Paul Y. Yee	Reg. No. 29,460
Joseph P. Harps	Reg. No. 28,854	Thomas W. Speckman	Reg. No. 22,617
William D. Herrick	Reg. No. 25,468	Douglas H. Pauley	Reg. No. 33,295
Kyle K. Kappes	Reg. No. 34,864	Maxwell J. Petersen	Reg. No. 32,772
John P. Kirby, Jr.	Reg. No. 25,348	Mark E. Fejer	Reg. No. 34,817
Nancy M. Klembus	Reg. No. 40,051	Charles C. Kinne	Reg. No. 31,631
Nicholas N. Leach	Reg. No. 31,776	Nick C. Kottis	Reg. No. 31,974
Thomas J. Mielke	Reg. No. 31,399	Kevin D. Erickson	Reg. No. 38,736
Douglas L. Miller	Reg. No. 30,406	Roland W. Norris	Reg. No. 32,799
Thomas M. Parker	Reg. No. 42,062	Melanie I. Rauch	Reg. No. 40,924
		Eric T. Krischke	Reg. No. 42,769

Docket No.: KCC-14,867

**COMBINED DECLARATION, POWER  
OF ATTORNEY AND PETITION**

**SEND CORRESPONDENCE TO:**

Roland W. Norris  
Pauley Petersen Kinne & Fejer  
2800 West Higgins Road, Suite 365  
Hoffman Estates, Illinois 60195  
FAX (847) 490-1403

**DIRECT TELEPHONE CALLS TO:**

Roland W. Norris  
(847) 490-1400  
(847) 490-1403 - Fax

**PETITION**

Wherefore we Pray that Letters Patent be granted to us for the invention or discovery described and claimed in the attached specification and claims, and we hereby subscribe our names to the attached specification and claims, Declaration, Power of Attorney and this Petition.

**DECLARATION**

The undersigned further declare that all statements made herein of their knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

\_\_\_\_\_  
Date

\_\_\_\_\_  
Edward Jason WHITE

\_\_\_\_\_  
Date

\_\_\_\_\_  
Kurtis Lee BROWN

\_\_\_\_\_  
Date

\_\_\_\_\_  
John Herbert CONRAD

\_\_\_\_\_  
Date

\_\_\_\_\_  
Robert James GERNDT

\_\_\_\_\_  
Date

\_\_\_\_\_  
Jose Enrique MALDONADO